


CITYLINE

Plywood Construction

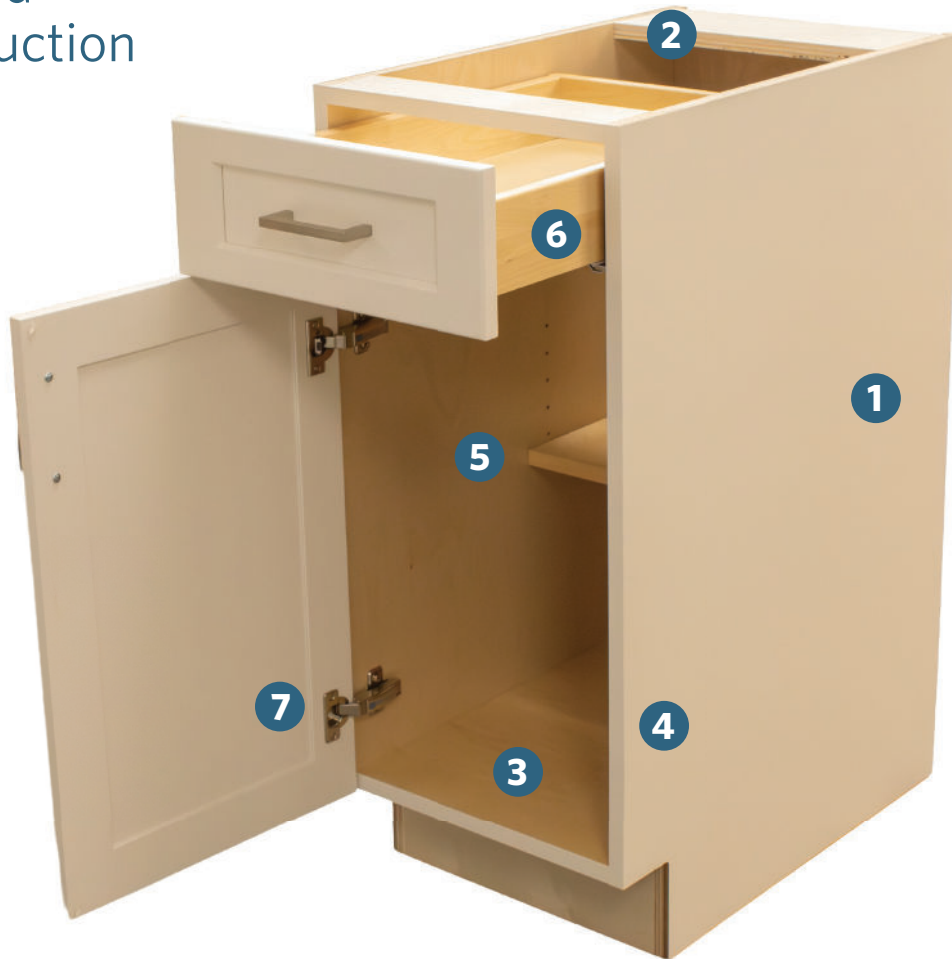

- 1 Standard construction consists of 3/4" combi-core plywood with finished sides. All sides, tops, bottoms, stretchers and shelving are 3/4" thick with 1/2" back panel.
- 2 Cabinets are doweled and glued before being assembled using an automated case clamp to ensure a rigid cabinet that is true and square.
- 3 Interior components have a prefinished natural wood veneer. Finished end and panels are covered with laminating paper complementary to the color of the door.
- 4 Front edges are taped with coordinating PVC edgebanding.
- 5 Shelving is full depth on wall cabinets and half depth on standard base cabinets. All shelves 3/4" thick.
- 6 Standard drawer box consists of a 5/8" wood dovetail drawer and 1/4" captured bottom with Blum Edge softclose undermount slide.
- 7 Each door has one soft-close, others standard fully concealed 3-way cam-adjustable Blum quick release hinges.

Metropolitan
MANUFACTURERS OF CABINETS & COUNTERTOPS

metcabinet.com | 800.698.8999